

HAND OPERATED SLEEVE WRAPPER



Mod. MA 700 M

Models

MA 500 M – MA 700 M – MA 900 M

Hand operated sleeve wrapper complete of tunnel mounted on same framework of steel sheets, duly treated and varnished with epossidic powder.

Operation

Product to be wrapped is loaded on packing table and wrapped manually with film, then shifted over sealing blade which driven by pedal or with handle seal the film.

Shrink is performed pushing goods in following tunnel. Tunnel grants a high shrink efficiency in relation with small power consumption.

For packing of loose goods we advice the use of carton or other type tray.

Main features

- ▶ Film cut by hot wire controlled by transformer.
- ▶ Sealing teflon coated hot bar electronically controlled (for model MA 700-900 M).
- ▶ Tunnel with air recyrculation with temperature controlled by thermostat (for model MA 500 M) or electronic thermoregulator (for models MA 700-900 M).
- ▶ Tunnel conveyor zinc coated mesh, fixed speed of 3 mt/min.
- ▶ Shrink chamber in steel sheet, studied for a positive heat release of heating electric plugs (embodied in tube and provided with wings) and for a high air flow recyrculation, for minimising heat loss.
- ▶ Adjustable air flow with suitable shutters.
- ▶ Used film: Flat polyethylene film.
- ▶ Average output: 120/200 pack/hour (purety indicative indication as depend type and dimension of product, consequence of package and type of film used).



Via Puccini, 10 20028 S.Vittore Olona
MILANO - ITALIA
Tel.+39.0331.421658 Fax +39.0331.511434
www.vimacor.it info@vimacor.it

HAND OPERATED SLEEVE WRAPPER

Optional

- ▶ Frequency changer (inverter) for adjusting tunnel conveyor speed.
- ▶ Product cooling fan.
- ▶ Film compressing rolls on tunnel outlet.
- ▶ Tunnel conveyor on application in stainless steel, or driven by side chains, or with rods of 10/15 mm diameter lined with rubber, or covered by a Teflon net.
- ▶ Straight or curved Unloading roller truck in different sizes.
- ▶ Tunnel conveyor extended on outlet of 800 mm for stabilising film after shrinking.


	MA 500 M	MA 700 M	MA 900 M
Sealing bar	length 520 mm hand operated	Length 720 mm pedal operated	length 920 mm pedal operated
Electrical	3 Ph 220/380 V 6.5 KW	3 Ph 220/380 V 10 KW	3 Ph 220/380 V 13 KW
Max reel size	Ø 250 x 480 mm	Ø 250 x 650 mm	Ø 250 x 850 mm
Tunnel hood	500 x H340 x 870 mm length	700 x H420x1150 mm length	900 x H420x1150 mm length

All data are not engaging



Via Puccini, 10 20028 S.Vittore Olona
MILANO - ITALIA
Tel.+39.0331.421658 Fax +39.0331.511434
www.vimacor.it info@vimacor.it

HAND OPERATED SLEEVE WRAPPER

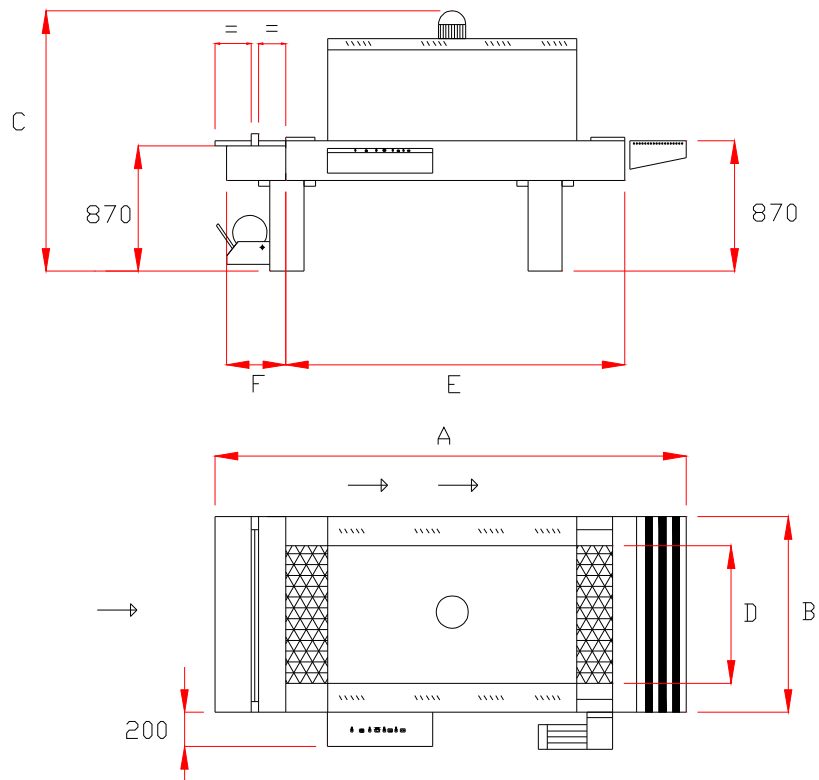

	A	B	C	D	E	F	Weight Kg.	Max conveyor load Kg.
MA 500 M	1800	660	1480	470	1190	310	140	12
MA 700 M	2510	860	1730	630	1610	600	250	15
MA 900 M	2510	1060	1730	820	1610	600	310	15

Sizes in millimetres – Data not engaging



Via Puccini, 10 20028 S.Vittore Olona
 MILANO - ITALIA
 Tel.+39.0331.421658 Fax +39.0331.511434
www.vimacor.it info@vimacor.it