

## MANUAL L-SEALER



Mod. SM 8060

### Model

SM 8060

Manual L-sealer made of steel sheets, treated and varnished with epossidic powder.

### Operation

After film setting by means of working table and roll holder, in accordance to product size, operator push product under upper film in sealing station. The sealing bar comes down manually performing the welding, the product is moved manually out of the welding zone allowing the subsequent packaging.

The sealer is suitable to pack manually the most various goods, single or multiple, using traditional hot sealable centrefold films.

### Main features

- ▶ Sealing bar with manual operated.
- ▶ Plan of sealing adjustable manually in height.
- ▶ Impulse sealing controller by times, sealing blade on down or top sealing bar.
- ▶ Suitable film: PVC, polypropylene, and polyethylene.
- ▶ Average output: 200/400 pack/hour (purely indicative indication as depend type and dimension of product, consequence of package and type of film used).



Via Puccini, 10 20028 S.Vittore Olona  
MILANO - ITALIA  
Tel.+39.0331.421658 Fax +39.0331.511434  
www.vimacor.it info@vimacor.it



# MANUAL L-SEALER

## Optional

- ▶ Magnet for stop sealing bar during sealing operation.

	<b>SM 8060</b>
Sealing bar	800 x 600 mm manual operated
Max reel size	Ø 250 x 750 mm
Electrical	1 Ph + T 220 V 3 KW

All data are not engaging

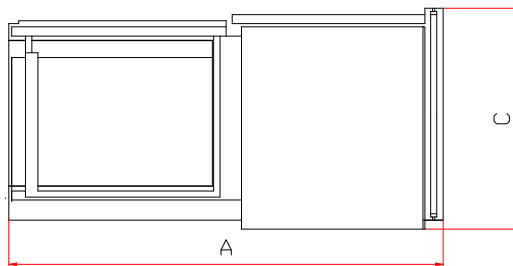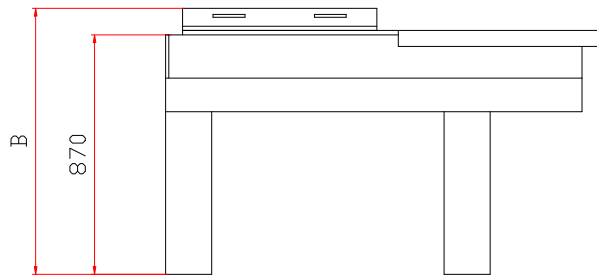

	<b>A</b>	<b>B</b>	<b>C</b>	<b>Kg.</b>
<b>SM 8060</b>	1950	1000	1100	170

Sizes in millimetres – Data not engaging



Via Puccini, 10 20028 S.Vittore Olona  
MILANO - ITALIA  
Tel.+39.0331.421658 Fax +39.0331.511434  
www.vimacor.it info@vimacor.it