

TUNNEL DOUBLE SHRINK



Models

Tunnel: TTA 12548 – TTA 14048 – TTA 16048 – TTA 18048 – TTA 20048

Our tunnels supplied with the wrapping machines have high shrinking efficiency, jointed to reduced power consumption.

Main features tunnel

- Tunnel conveyor zinc coated driven by side chains, speed adjustable with inverter.
- Tunnel electronic thermoregulator controlled air recycling.
- Double shrink chamber in steel sheet, studied for a positive heat release of heating electric plugs (embodied in tube and provided with wings) and for a high air flow recyrculation, for minimising heat loss.
- Adjustable air flow with suitable shutters.
- Product cooling fan.

Optional tunnel

- Film compressing rolls on tunnel outlet.
- Straight or curved Unloading roller truck in different sizes.
- Extended Tunnel conveyor on outlet.


	TTA 12548	TTA 14048	TTA 16048	TTA 18048	TTA 20048
Tunnel hood	1230 x H 480 x 2500 mm lenght	1350 x H 480 x 2500 mm lenght	1650 x H 480 x 2500 mm lenght	1800 x H 480 x 2500 mm lenght	2000 x H 480 x 2500 mm lenght
Electrical	3 Ph+N+T 220/380 V 42 KW	3 Ph+N+T 220/380 V 50 KW	3 Ph+N+T 220/380 V 54 KW	3 Ph+N+T 220/380 V 60 KW	3 Ph+N+T 220/380 V 65 KW

All data are not engaging



Via Puccini, 10 20028 S.Vittore Olona
MILANO - ITALIA
Tel.+39.0331.421658 Fax +39.0331.511434
www.vimacor.it info@vimacor.it

TUNNEL DOUBLE SHRINK

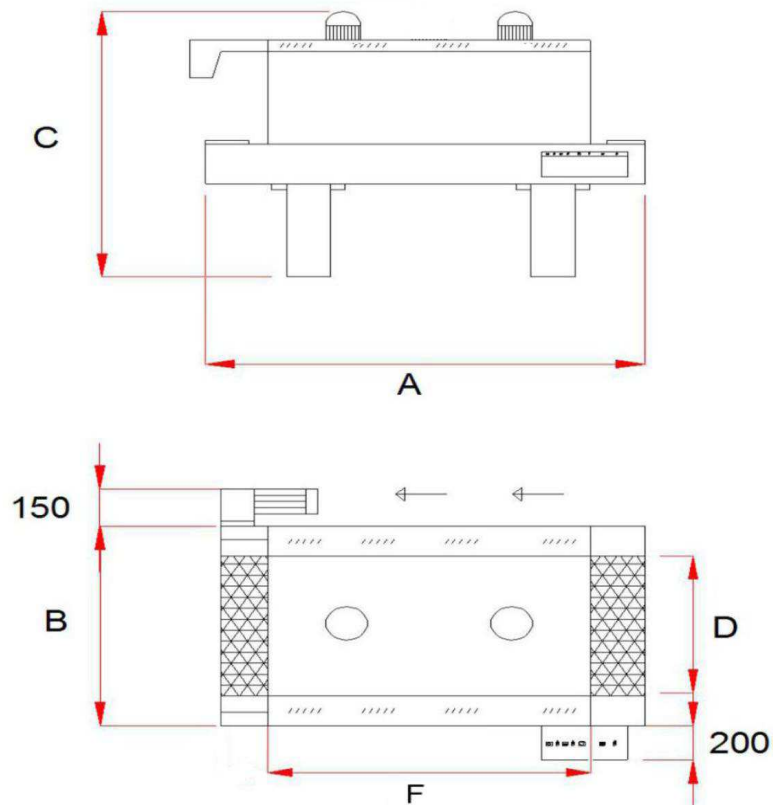

	A	B	C	D	F	Max conveyor load Kg.
TTA 12548	3000	1470	1850	990	2500	35
TTA 14048	3000	1750	1850	1150	2500	35
TTA 16048	3000	2050	1850	1300	2500	35
TTA 18048	3000	2300	1850	1600	2500	35
TTA 20048	3000	2550	1850	1600	2500	35

Sizes in millimetres – Data not engaging



Via Puccini, 10 20028 S.Vittore Olona
MILANO - ITALIA
Tel.+39.0331.421658 Fax +39.0331.511434
www.vimacor.it info@vimacor.it